


Odstarnit vsechny ostre hrany a otrepy!

Lakovani

zakladova barva: Walter 2K-HS Primer
 tloustka vrstvy 60-80 um
 odstín RAL 7035, matna
 kryci barva: Walter 2K-EL 2000
 tloustka vrstvy 60-80 um
 odstín RAL 5010, leskla

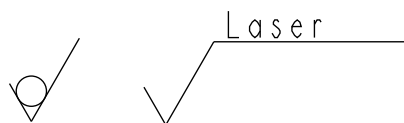

MATERIAL: II 375									
POLOTOVAR: PL4-130x35									
PROMITANI [ISO E]									
TOLEROVANI PODLE ISO 80151: NE									
PRESNOST ISO 2768 - mK									
						INDEX	ZMENA	DATUM	PODPIS
Podpis		Datum		Podpis		Datum		MERITKO	
NAVRHL	Radek Lhotan	04.01.2021	STATIK			HMOTNOST	0.132	kg	1:1
KRESLIL	Radek Lhotan	04.01.2021	NORM. REF.			MIKROFILM			C. SVITKU
SKUPINAR			PREZKOUSEL			SESTAVA	1605-00-01		KUSOVNIK
TECHNOLOG			SCHVALIL			STARÝ V.			



ČESKÉ VYSOKÉ UČENÍ
 TECHNICKÉ V PRAZE

FAKULTA STROJNÍ

NAZEV

KRYTKA OLEJ

TYP:

CÍSLO VYKRESU

1605-00-01-010

LIST: 1/1